
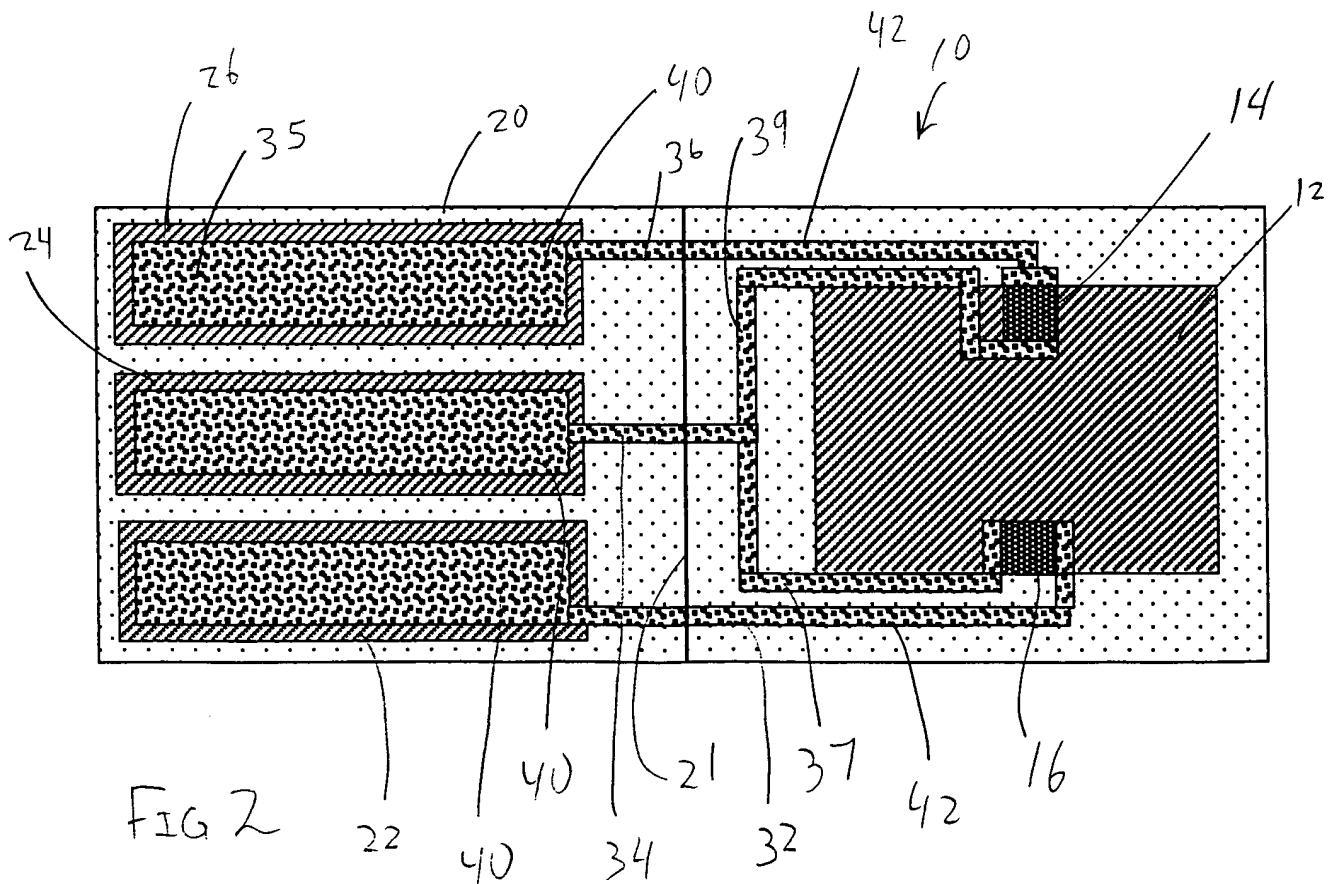


10022074

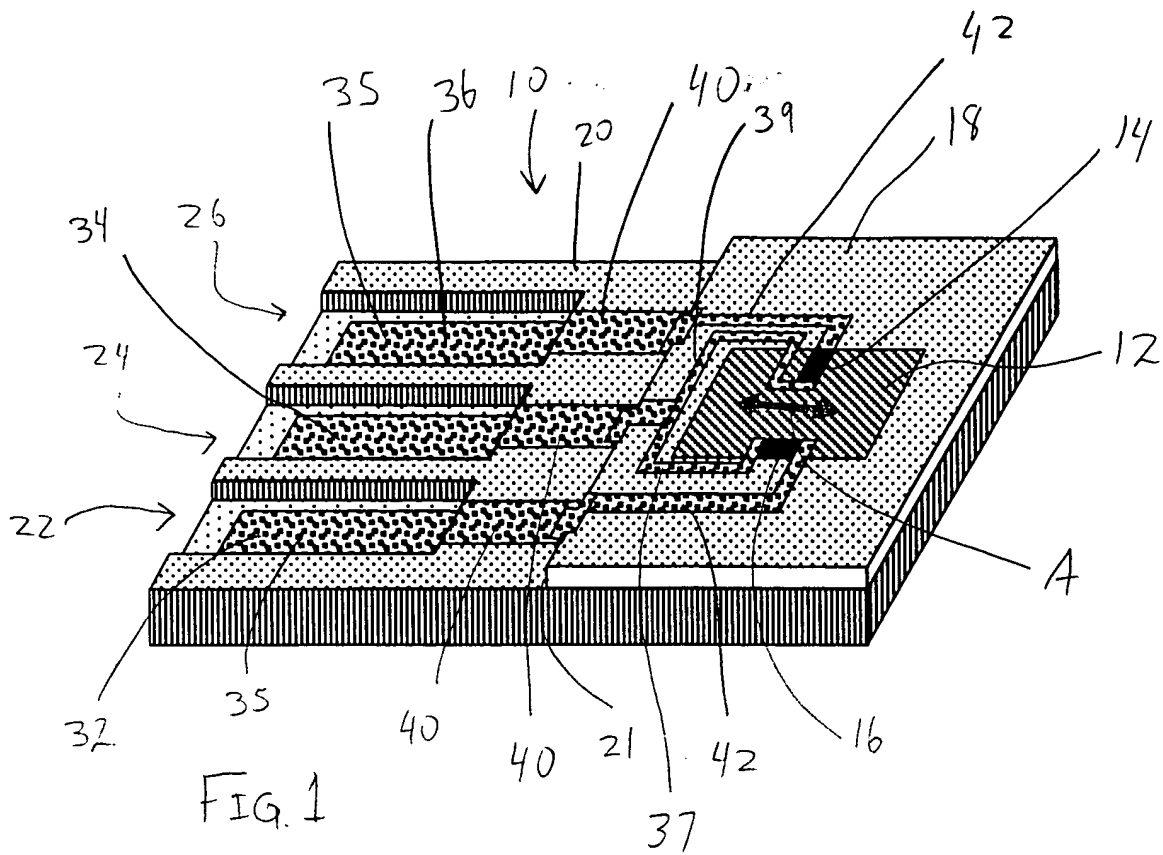

09909847-072001

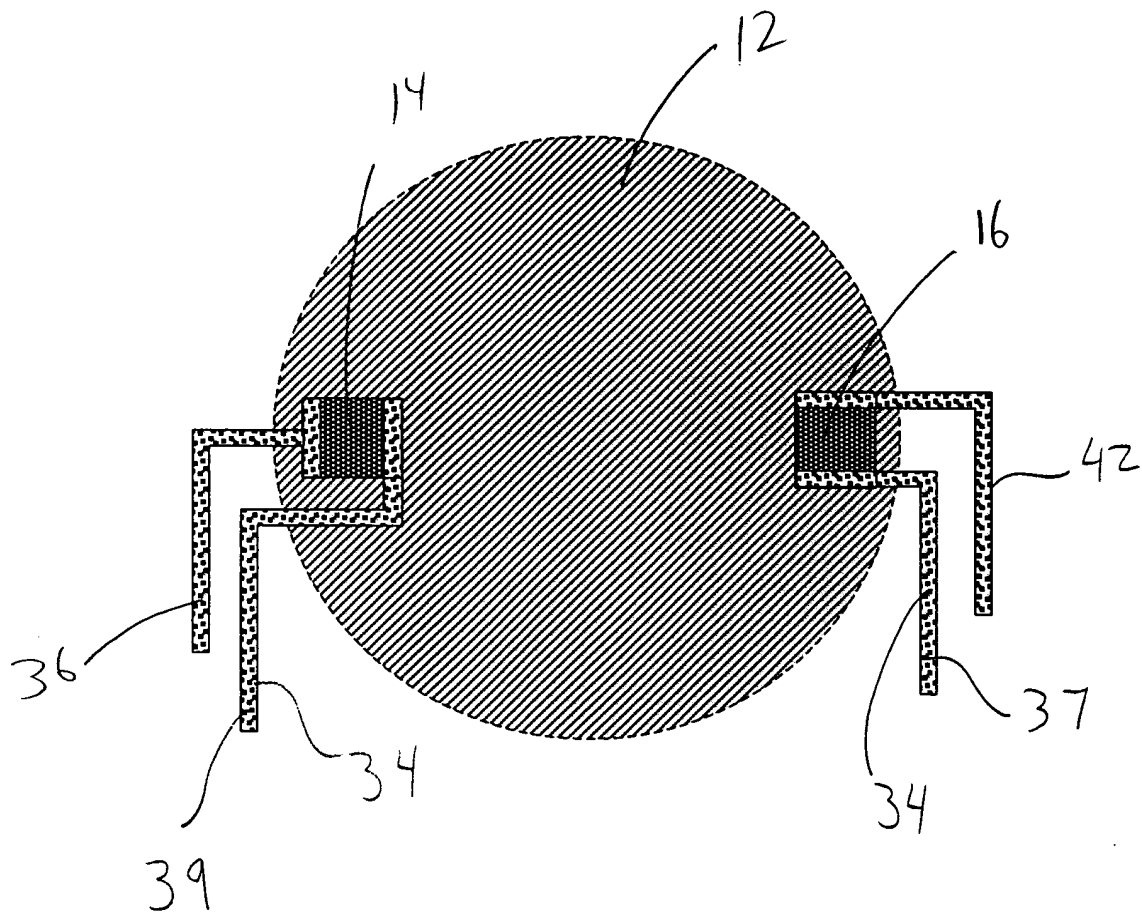
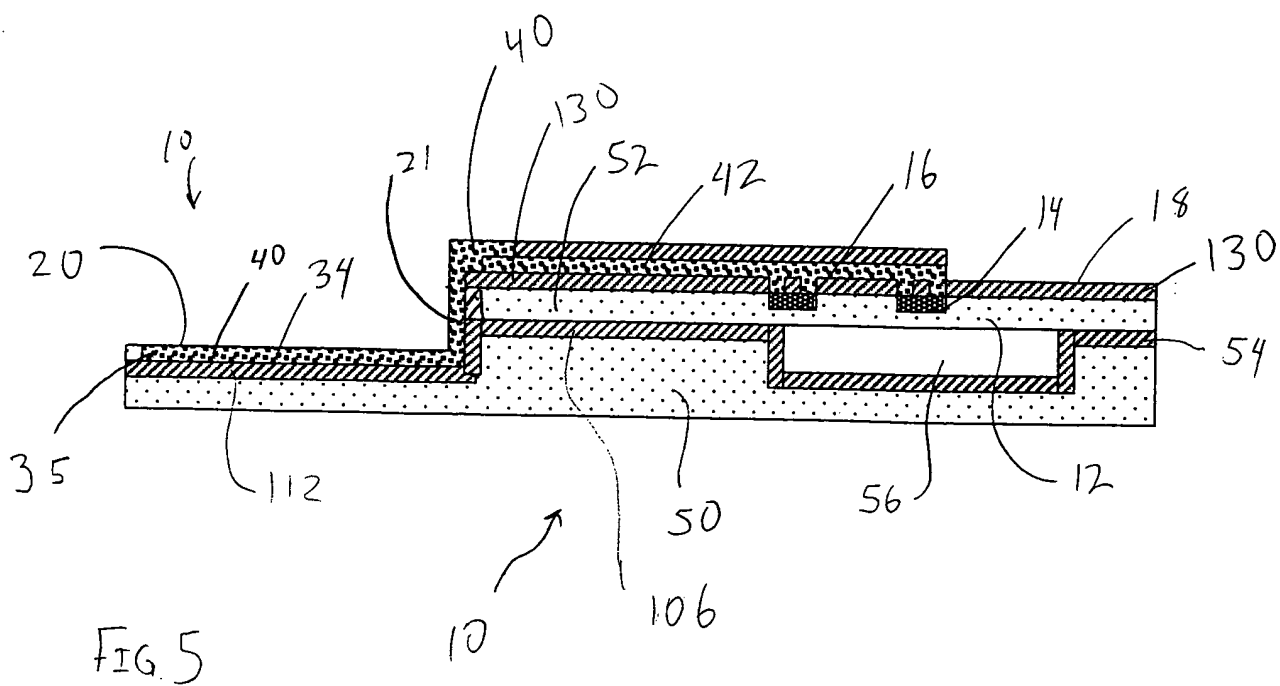
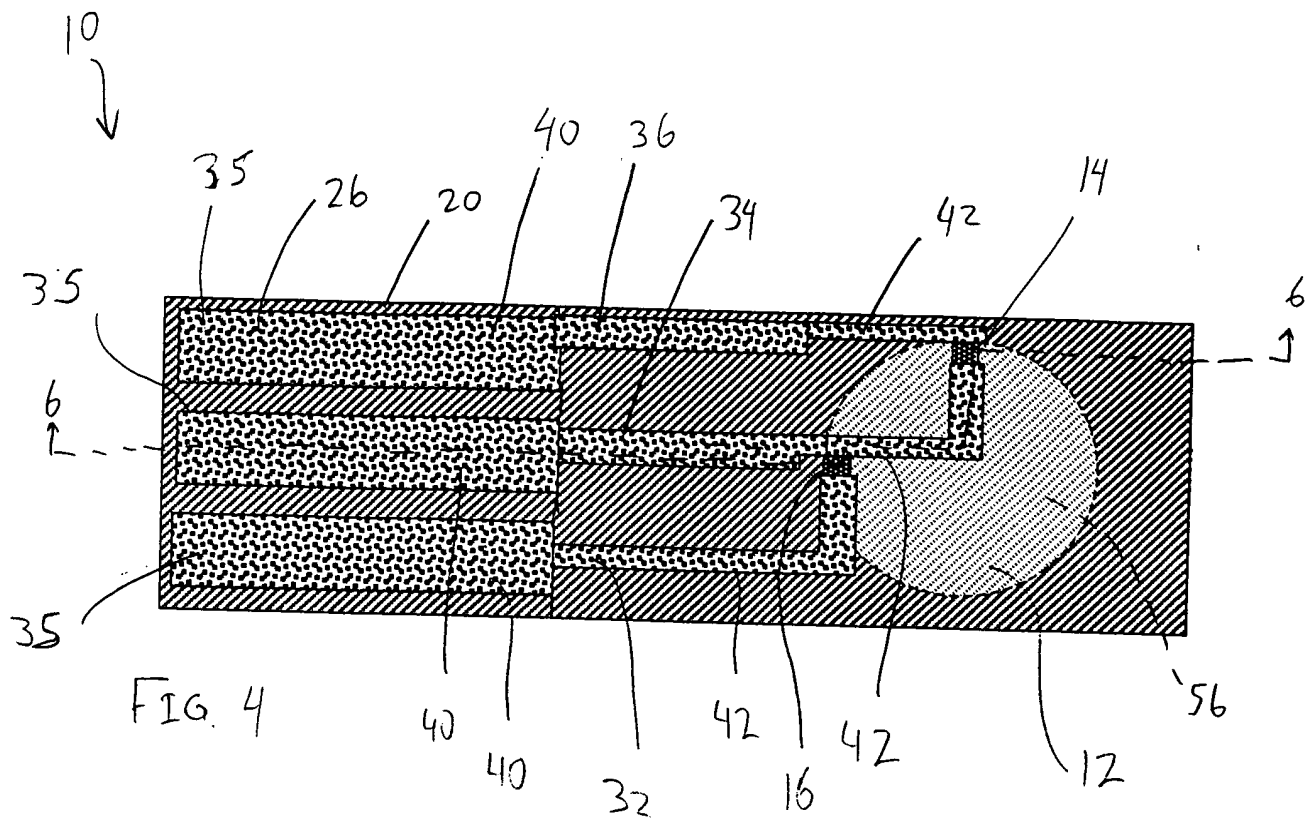


FIG. 3

FIG. 4



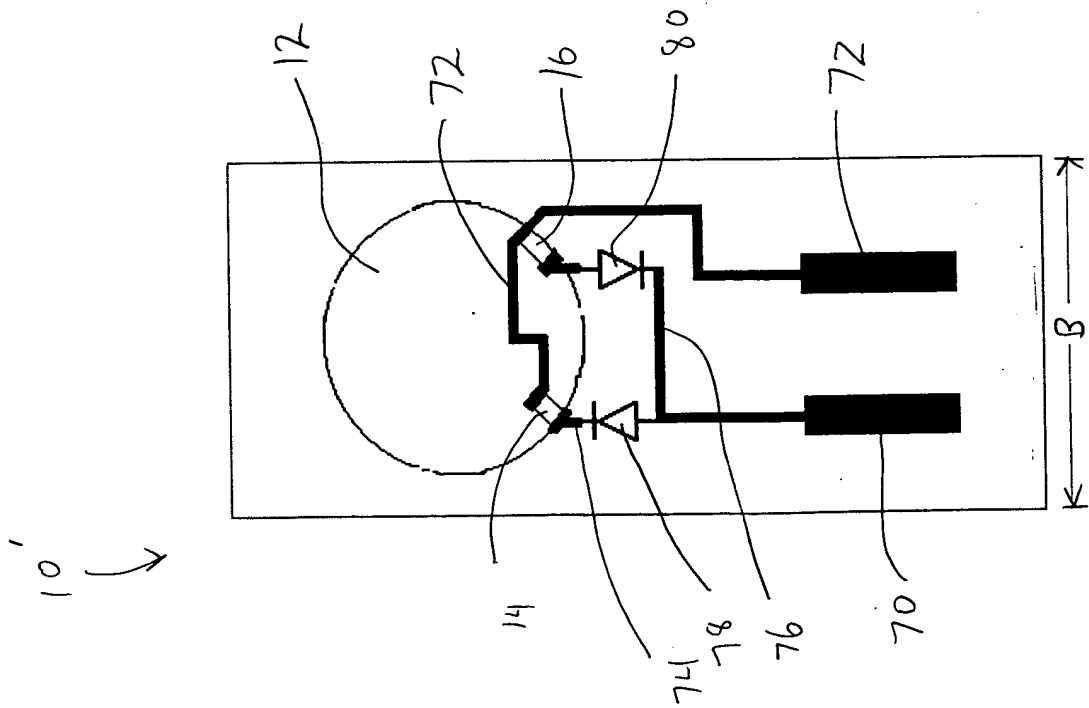


FIG. 6

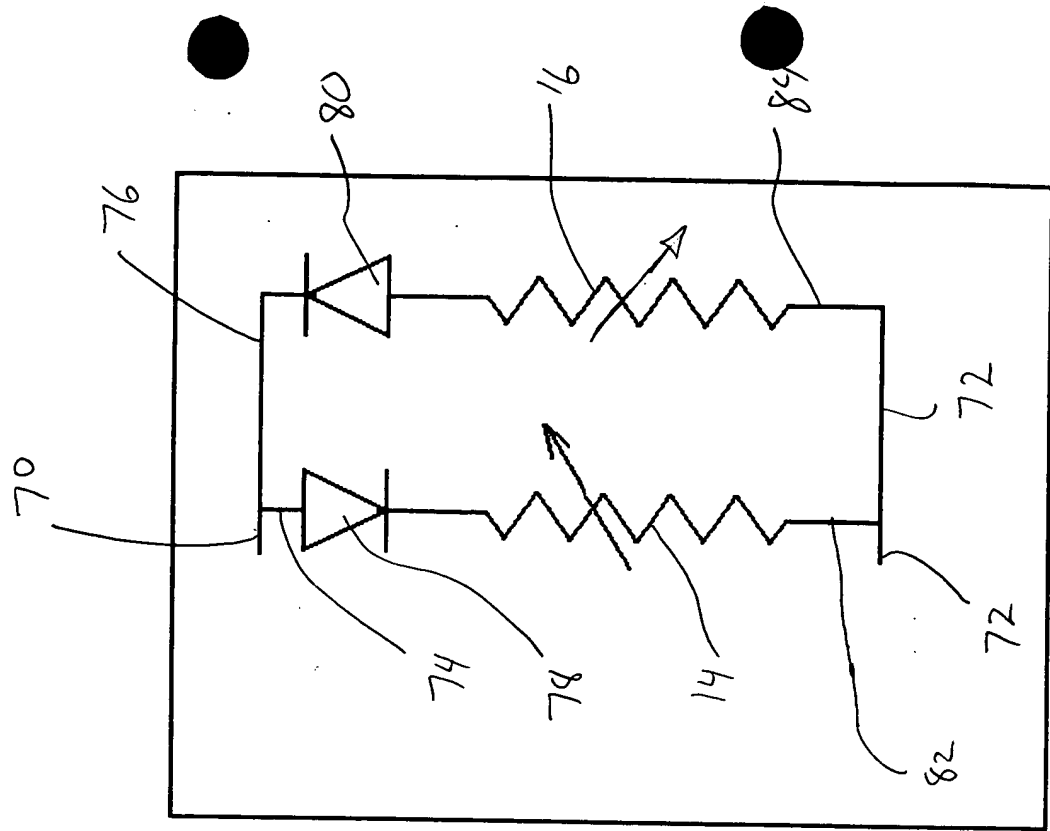


FIG. 7

The diagram illustrates a device 10, possibly a micro-electromechanical system (MEMS) component. It features a central circular element 12, which could be a diaphragm or a sensor element, surrounded by a square frame 14. The device is mounted on a substrate 8, with three vertical leads 32, 34, and 36 extending downwards. The leads 32 and 36 are connected to a common terminal 35, while lead 34 is connected to a separate terminal 34. The device is shown within a square frame 14, with dimensions A and B indicated. Various components are labeled with numbers: 10 (the entire device), 12 (central element), 14 (square frame), 16 (inner square frame), 32 (left lead), 34 (middle lead), 35 (right lead/terminal), 36 (bottom lead/terminal), 37 (inner square frame), 39 (inner square frame), 48 (substrate), and 88 (substrate).

[illegible]

1002260/24360660

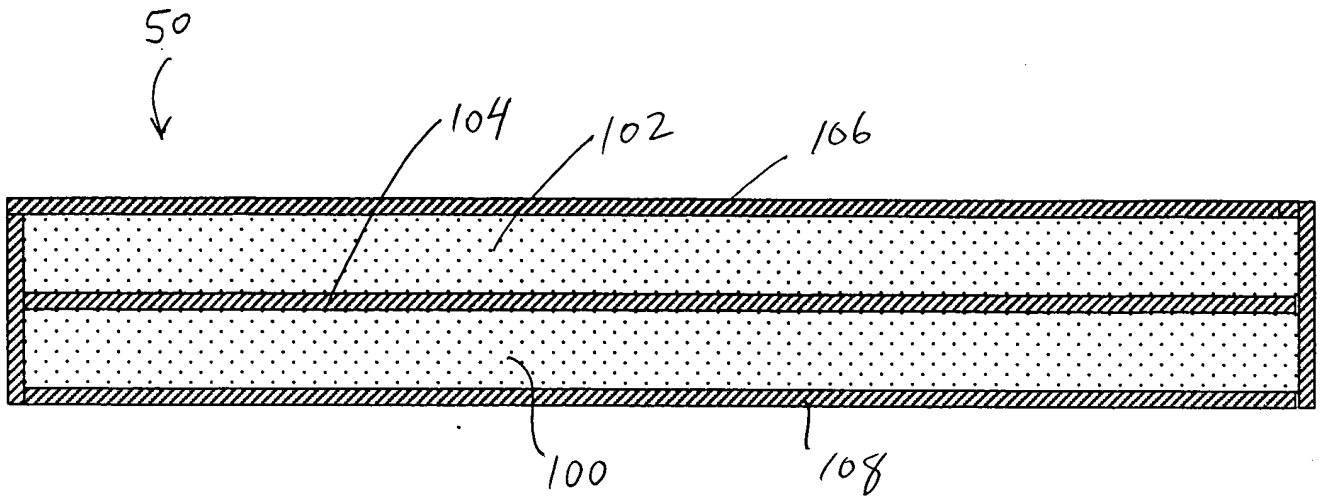


FIG. 10





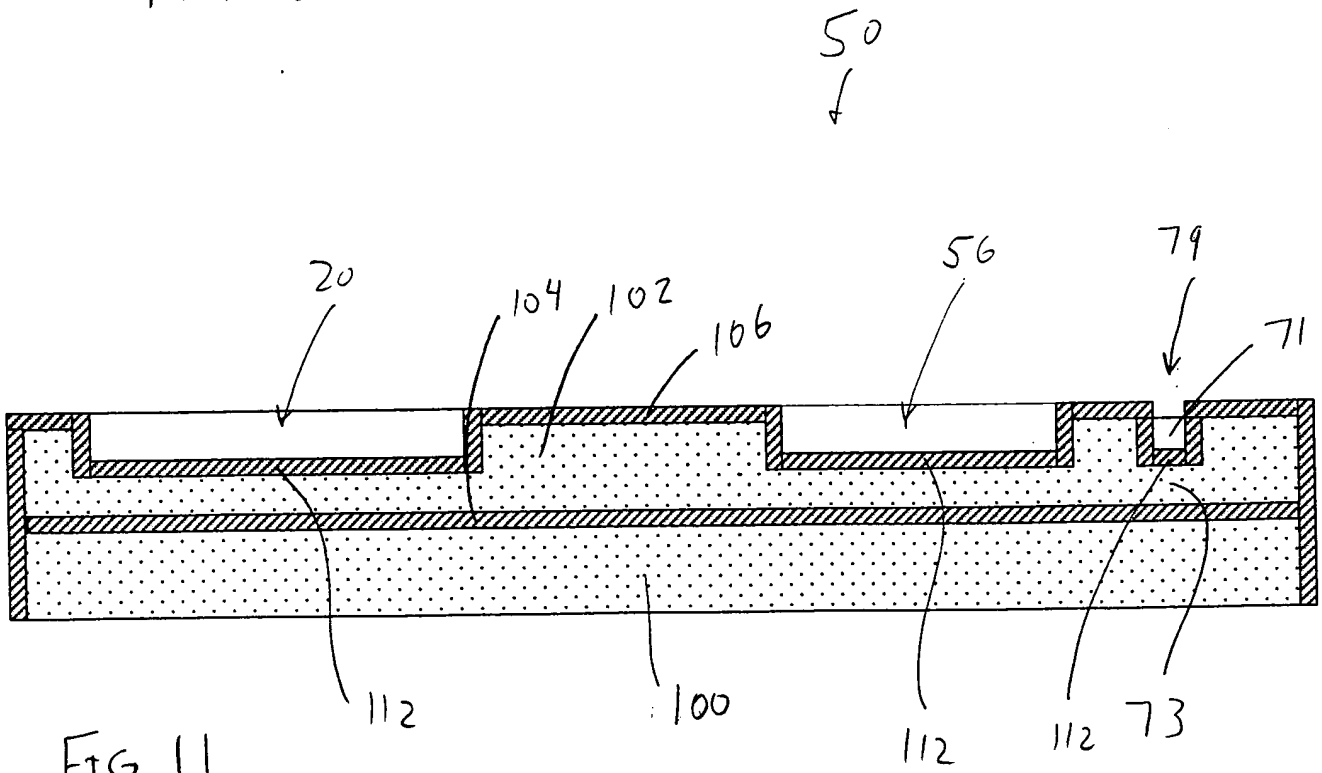


FIG. 11

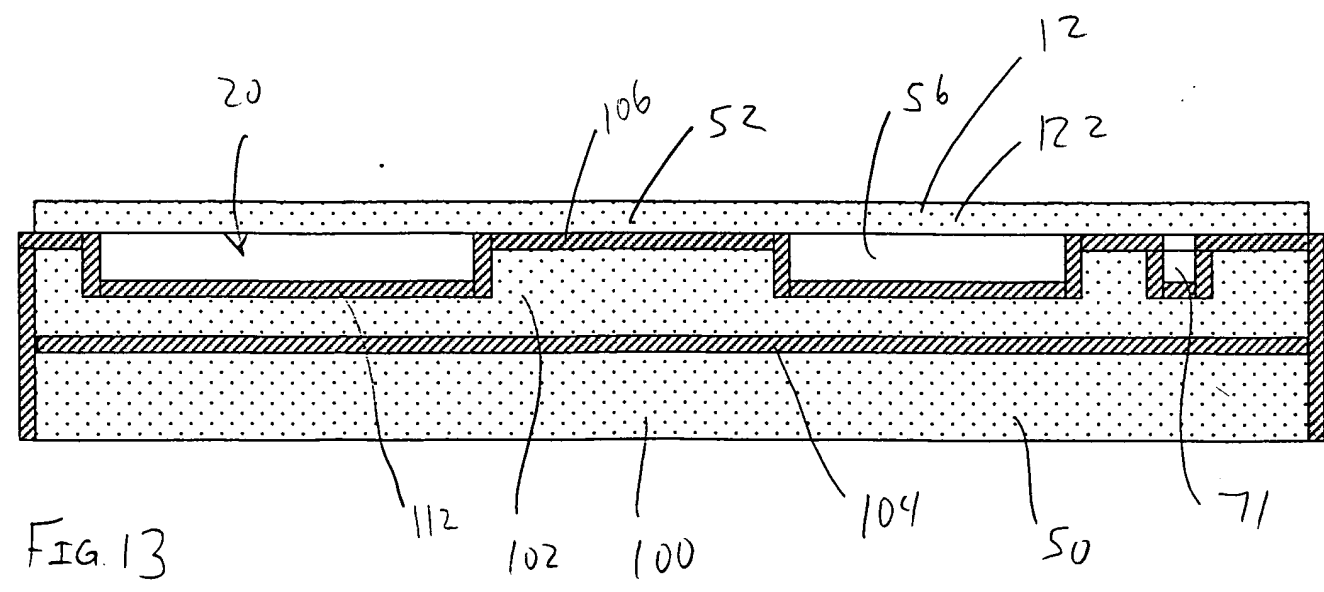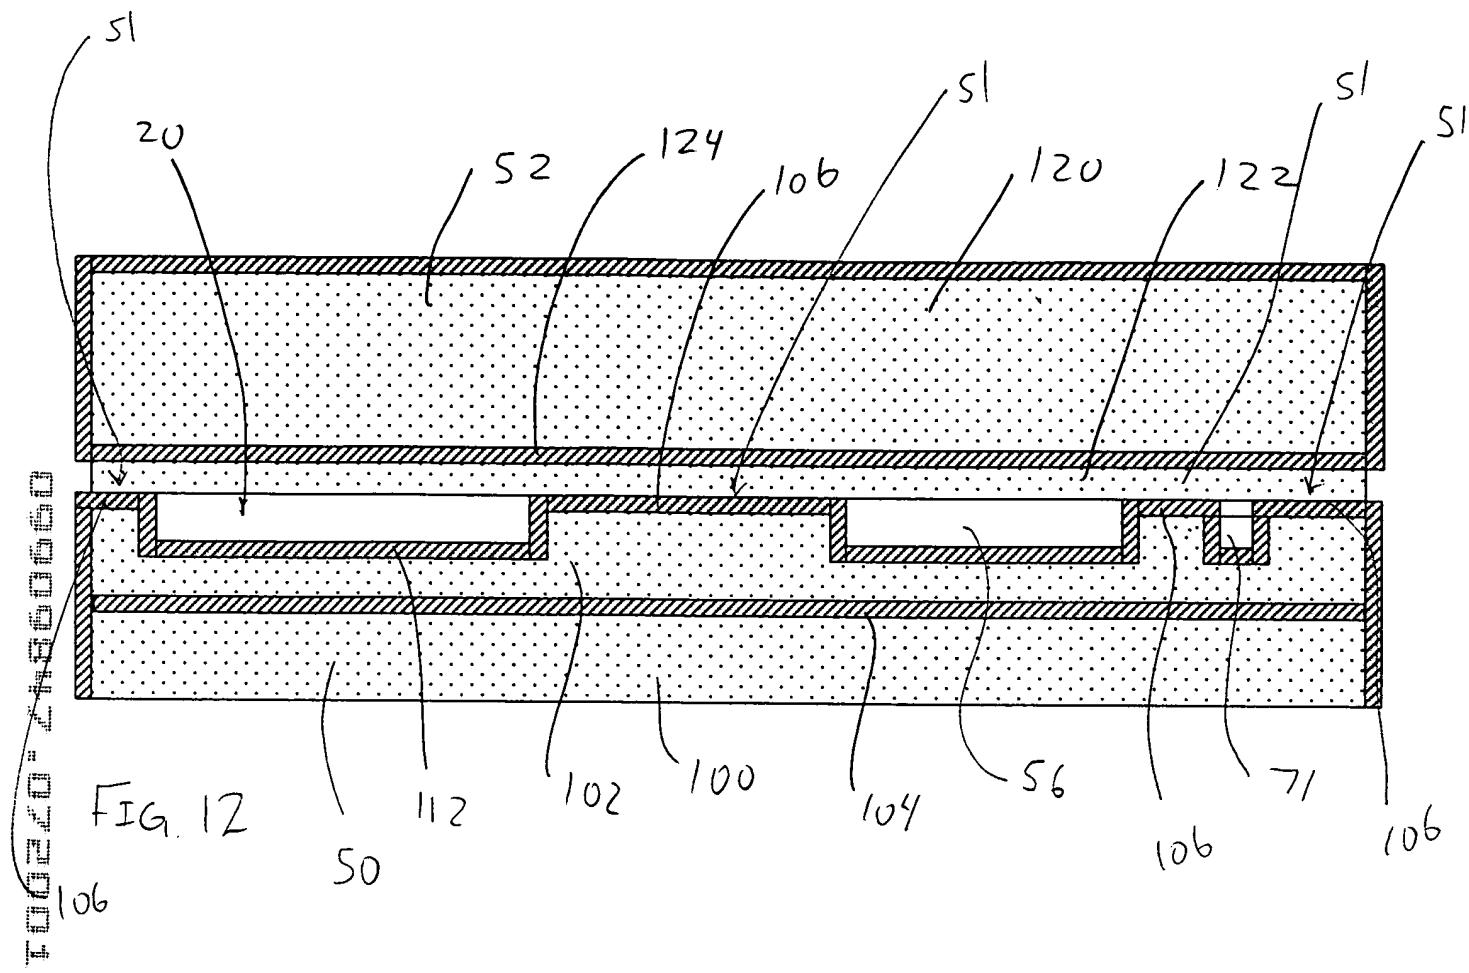

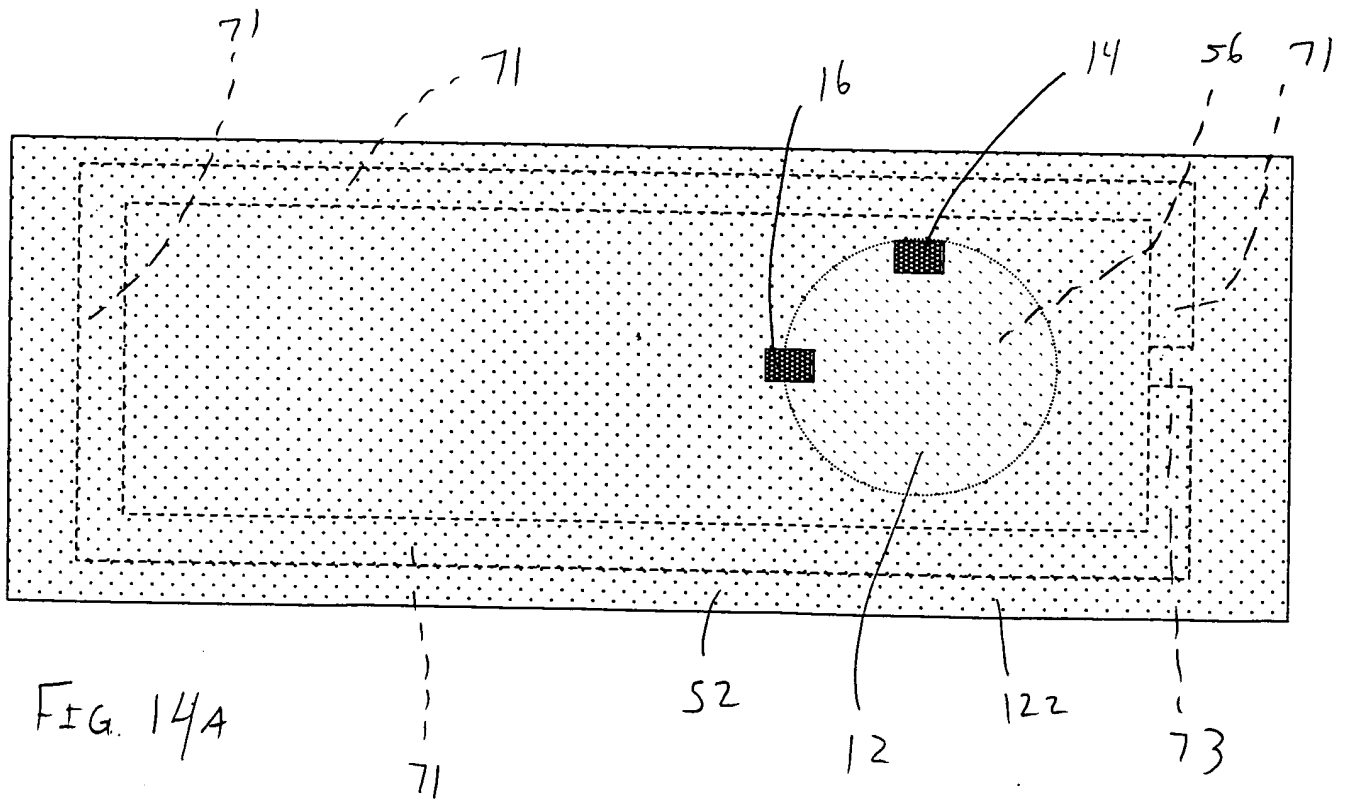

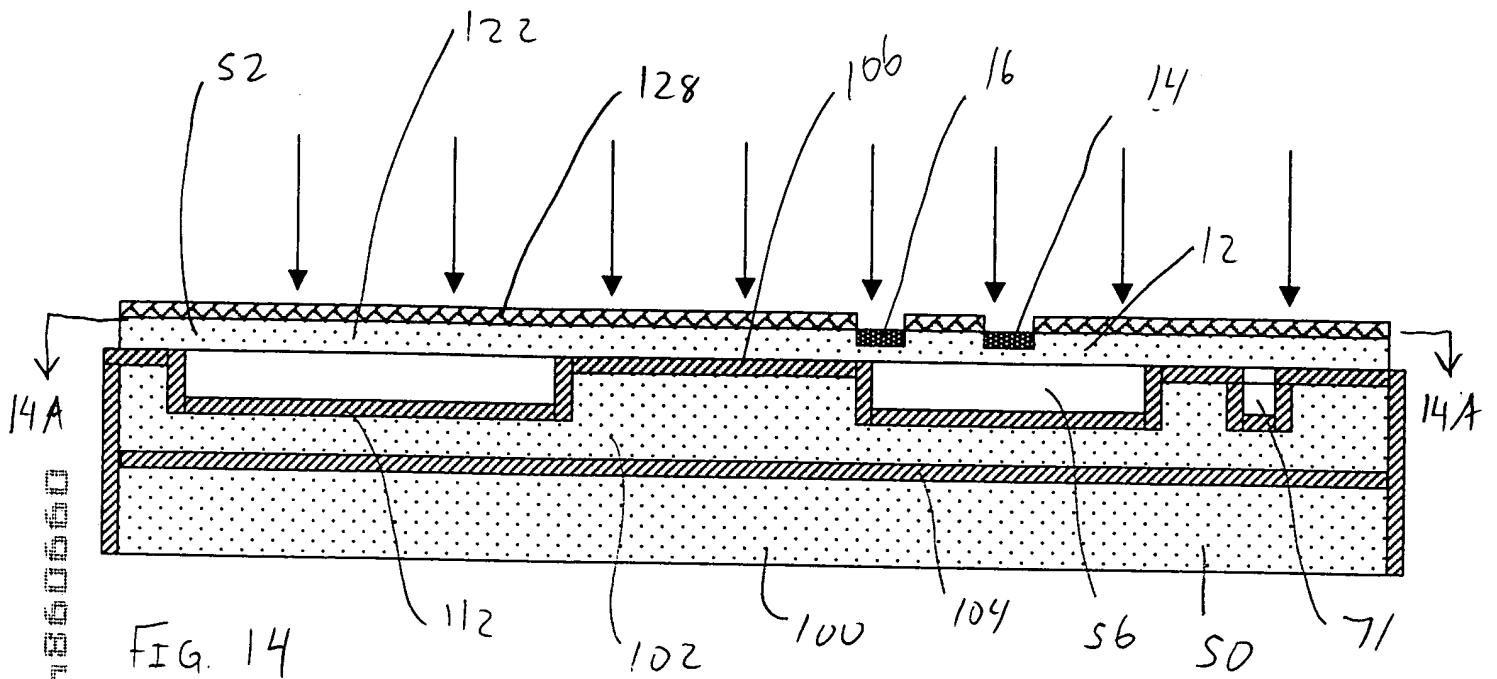

100220-24860660

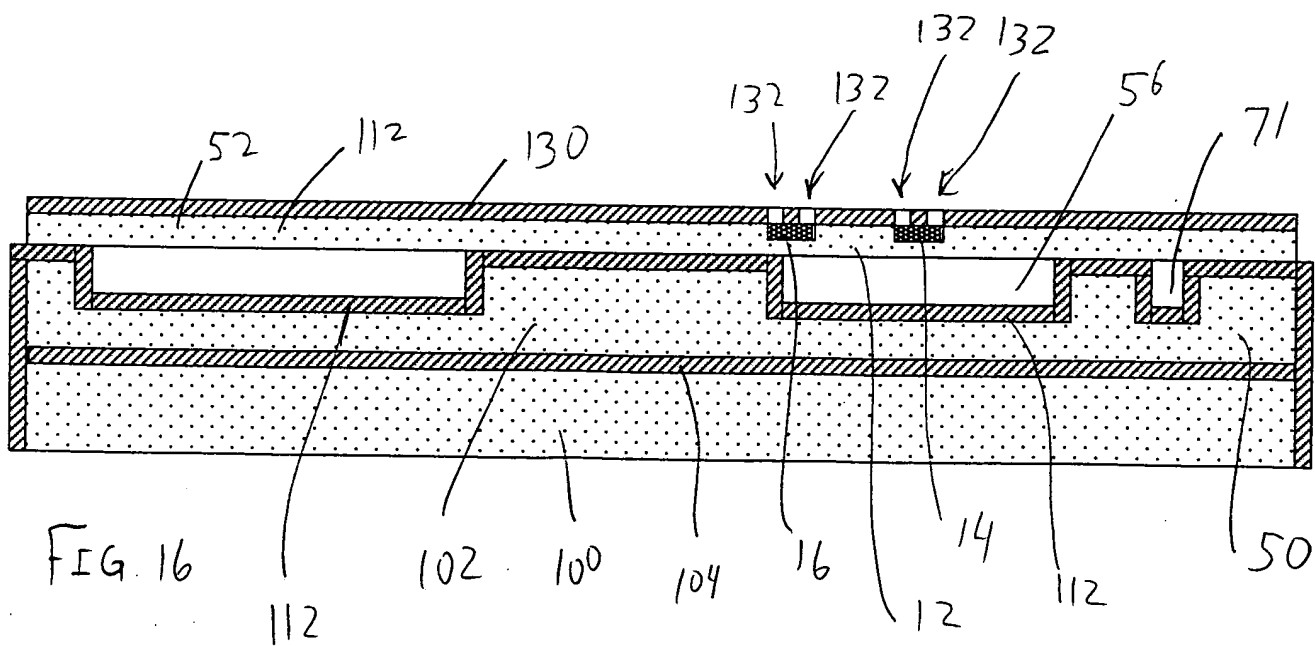
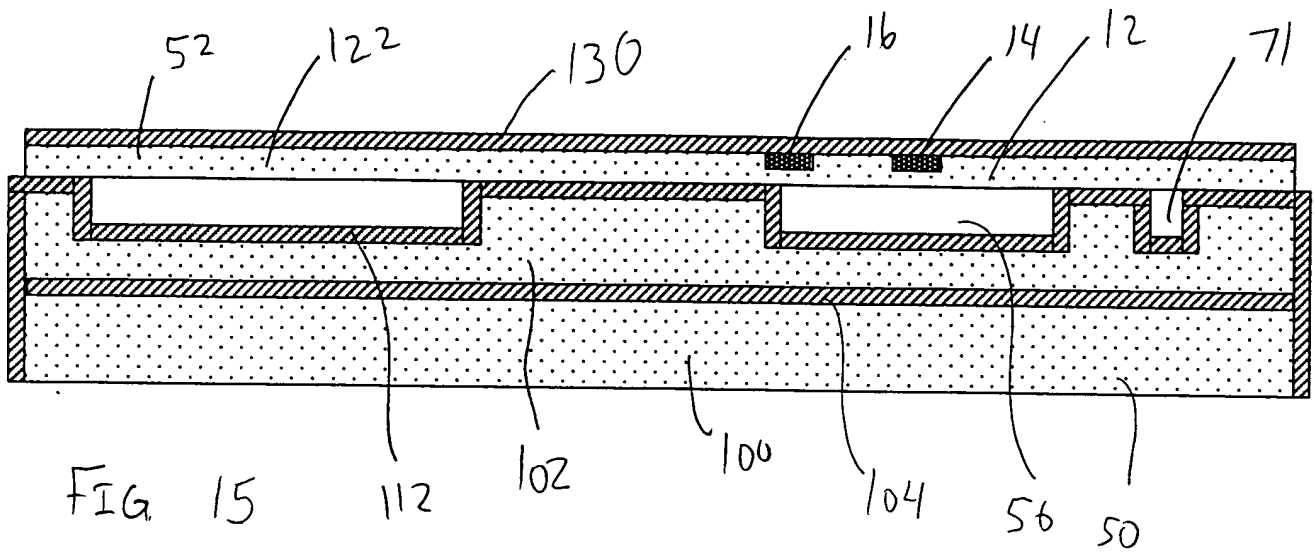


FIG. 17

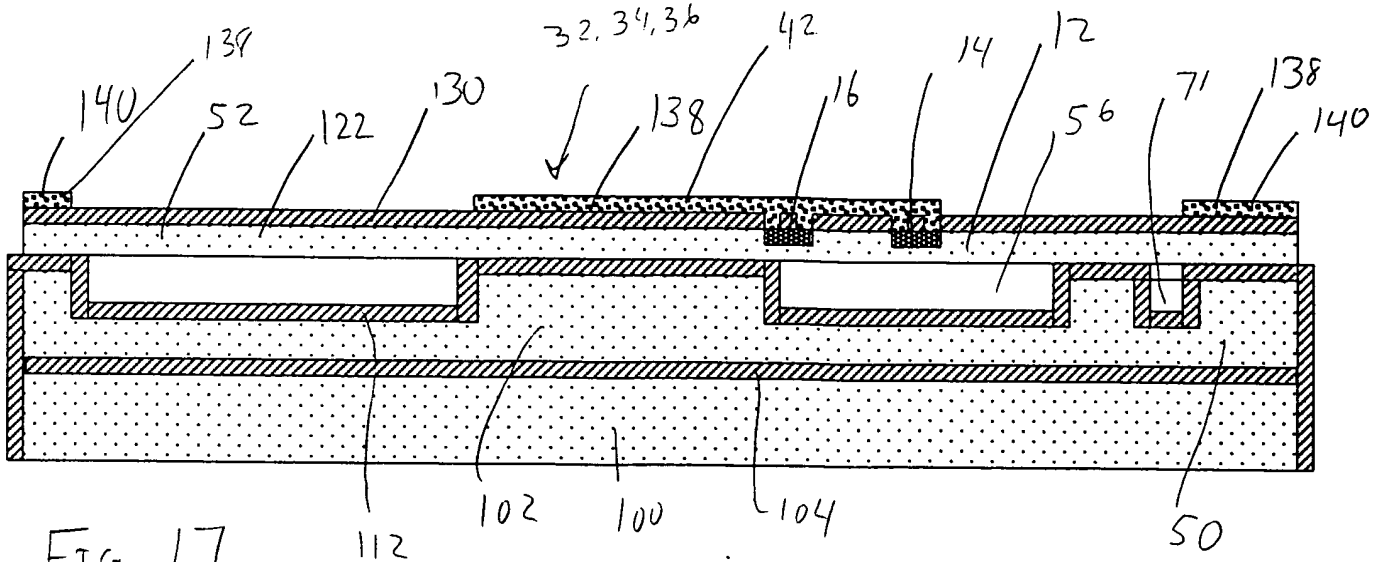


FIG. 17

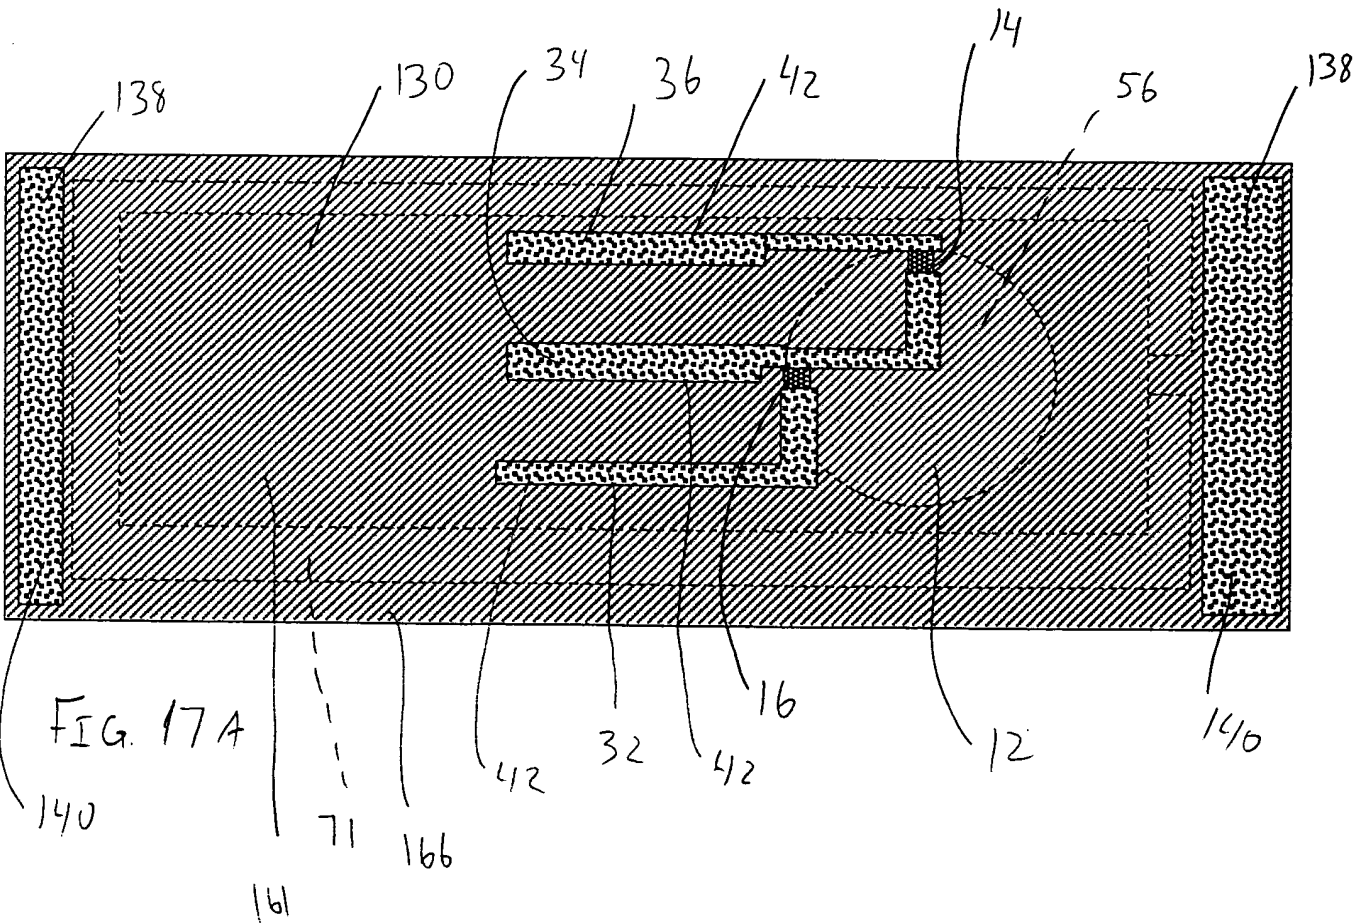


FIG. 17A



FIG. 19

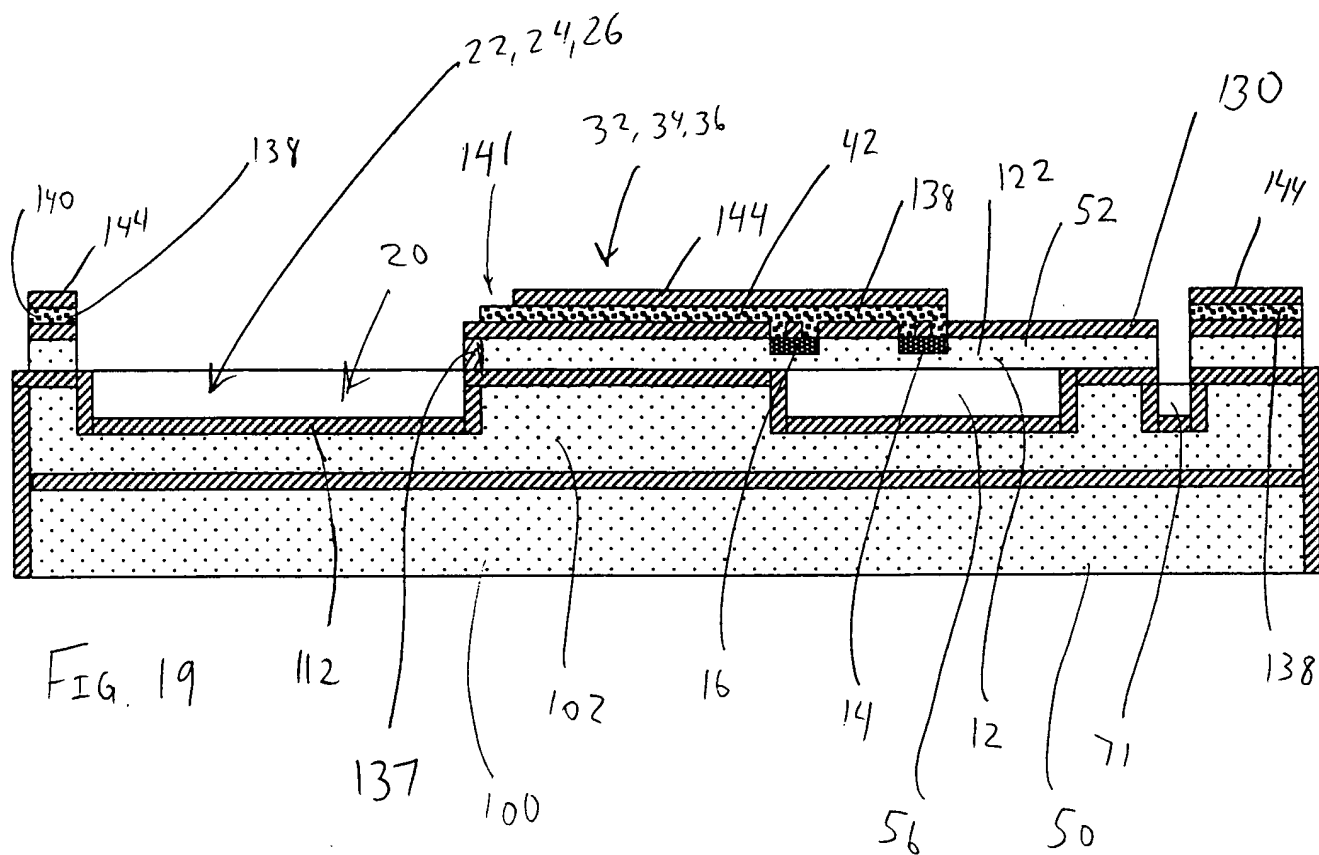


FIG. 19

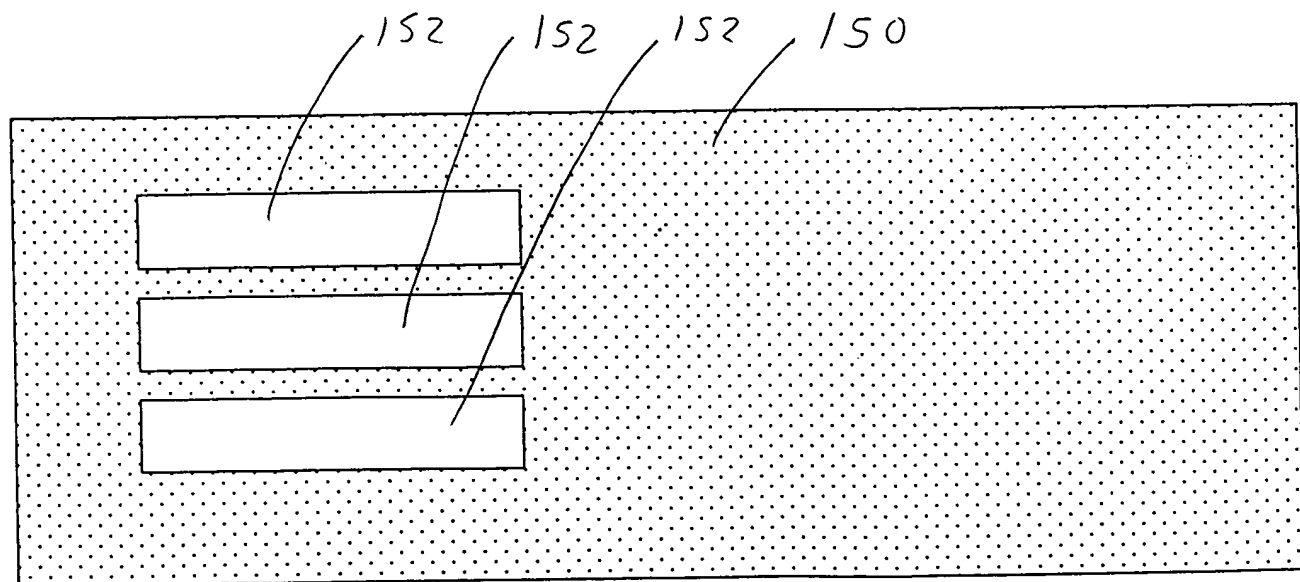
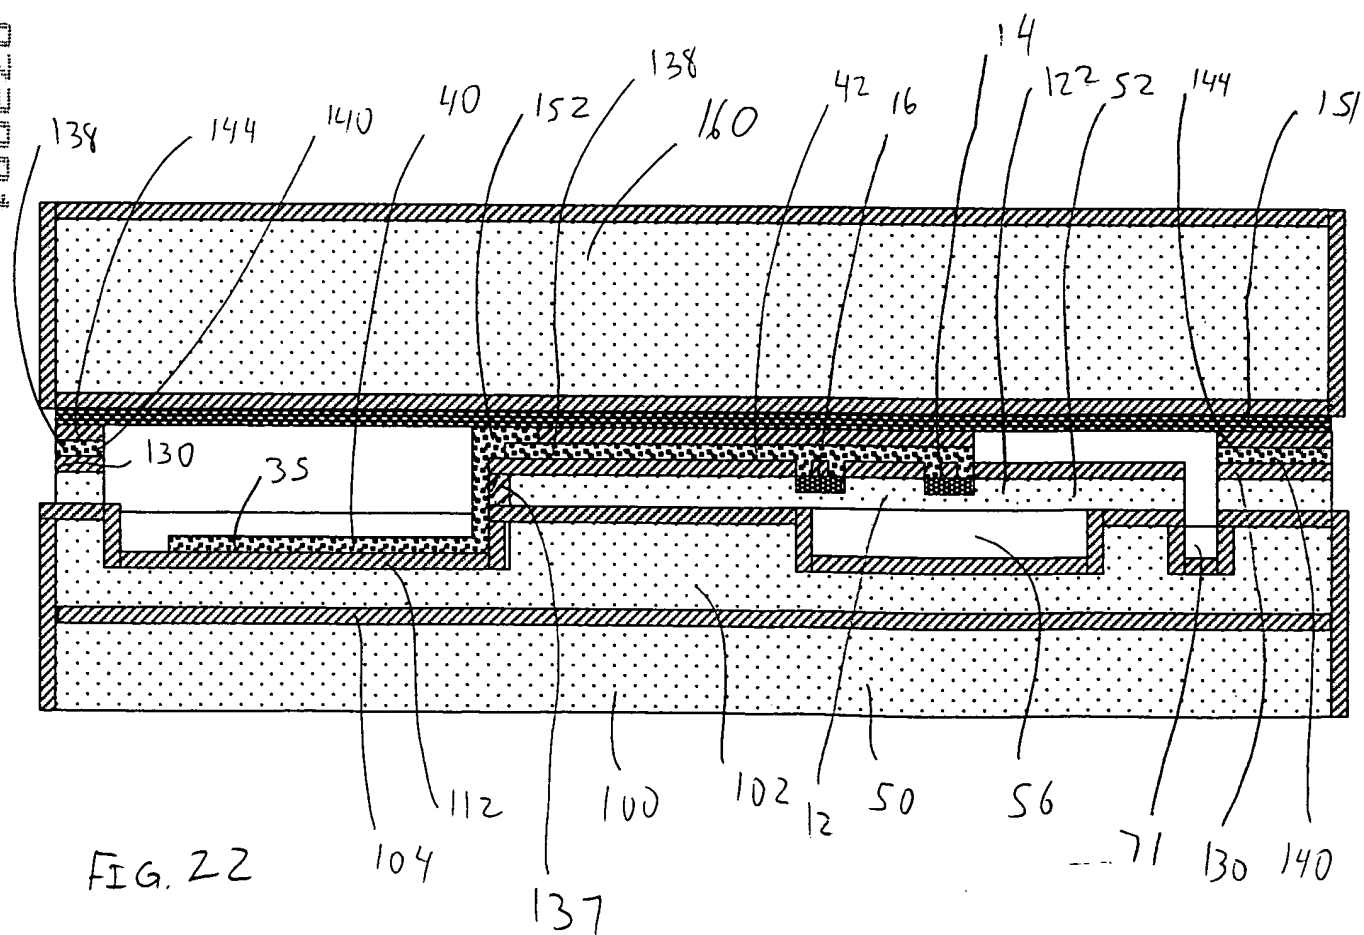
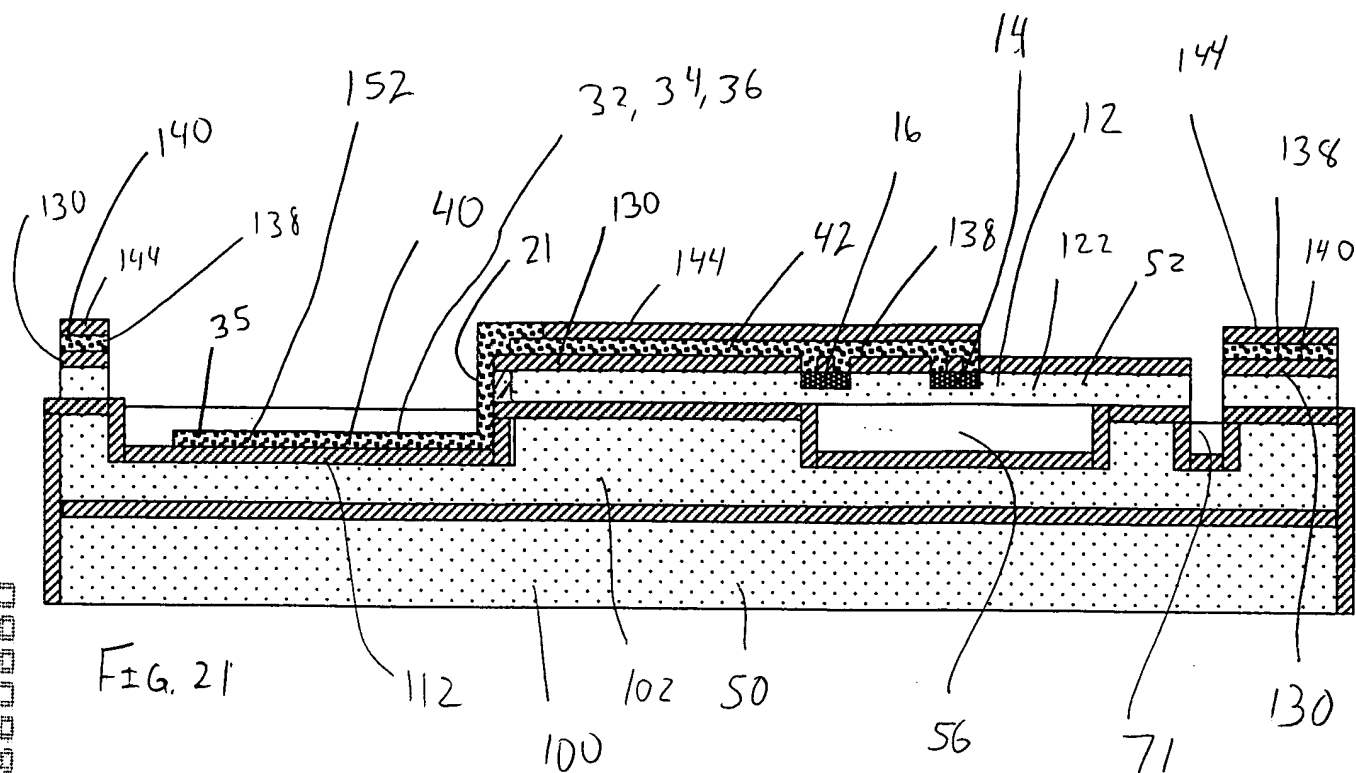


FIG. 20

10020-248650



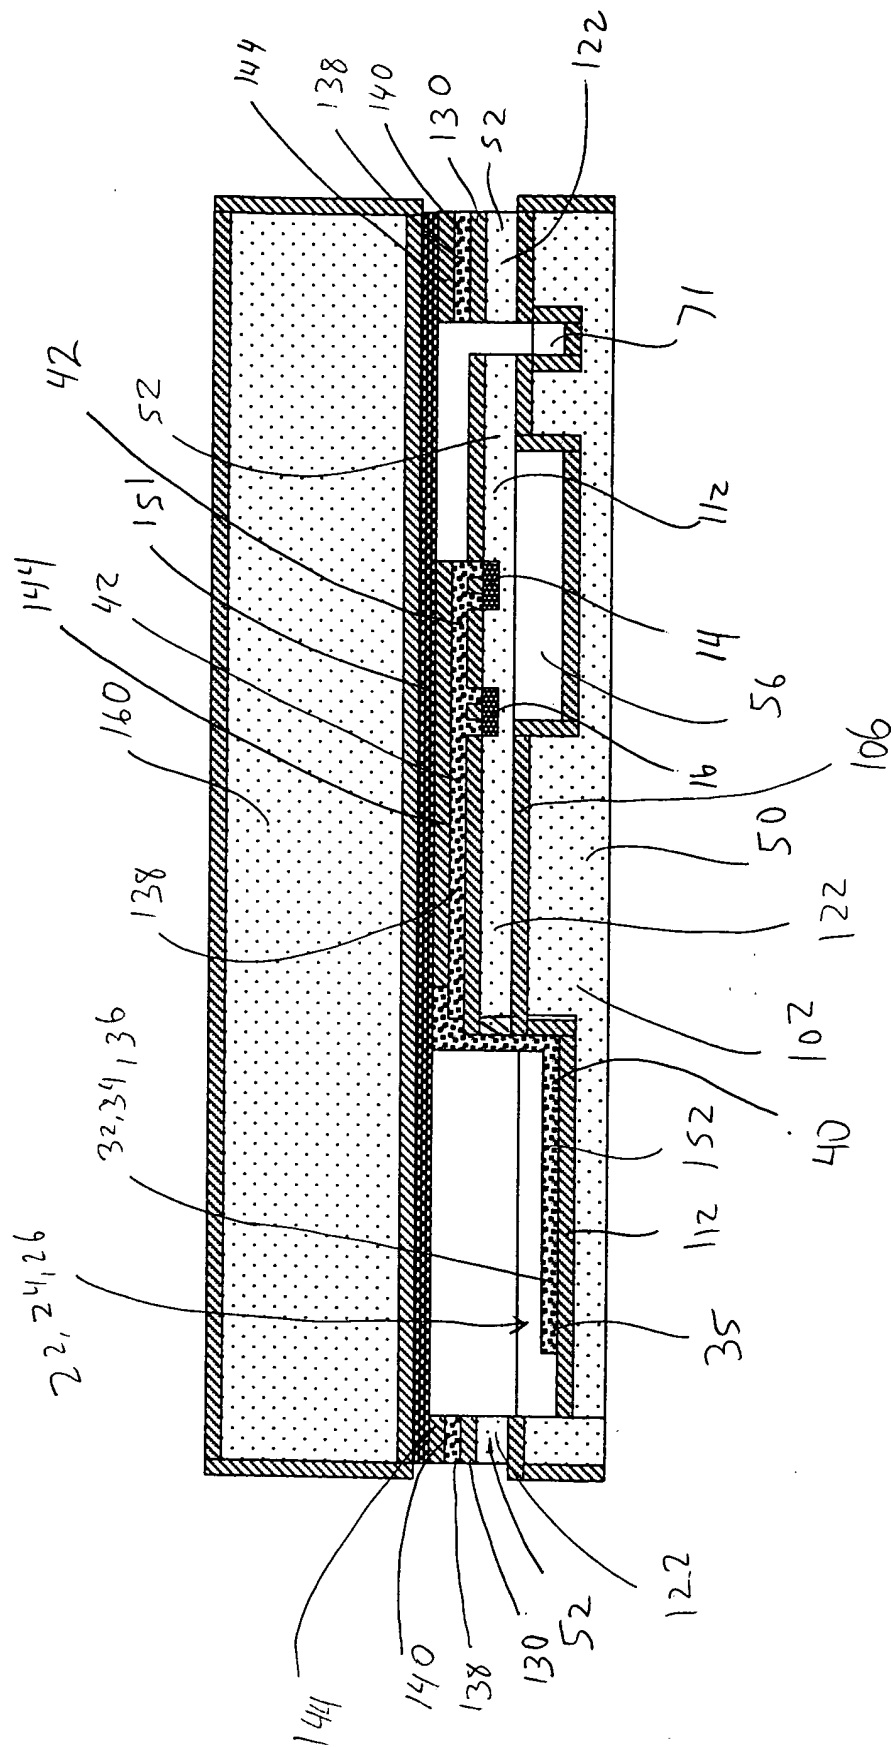


FIG. 23

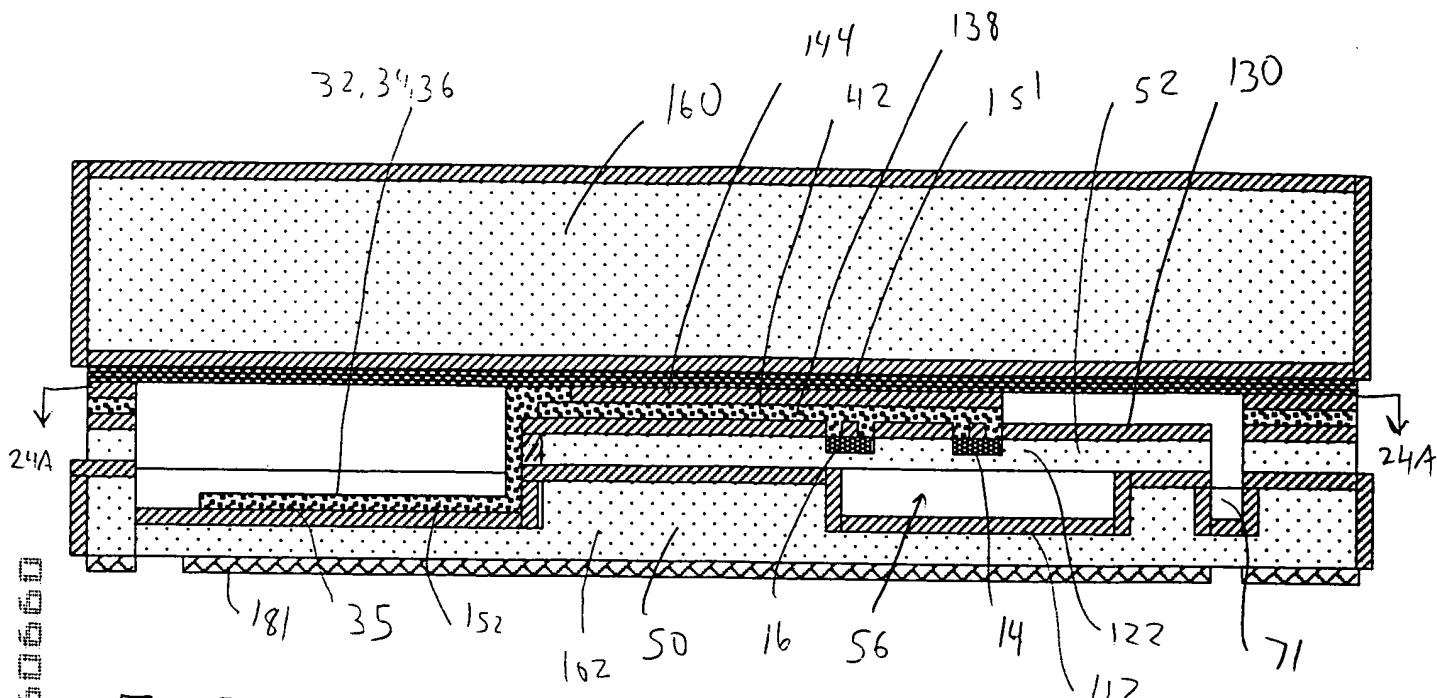


FIG. 24

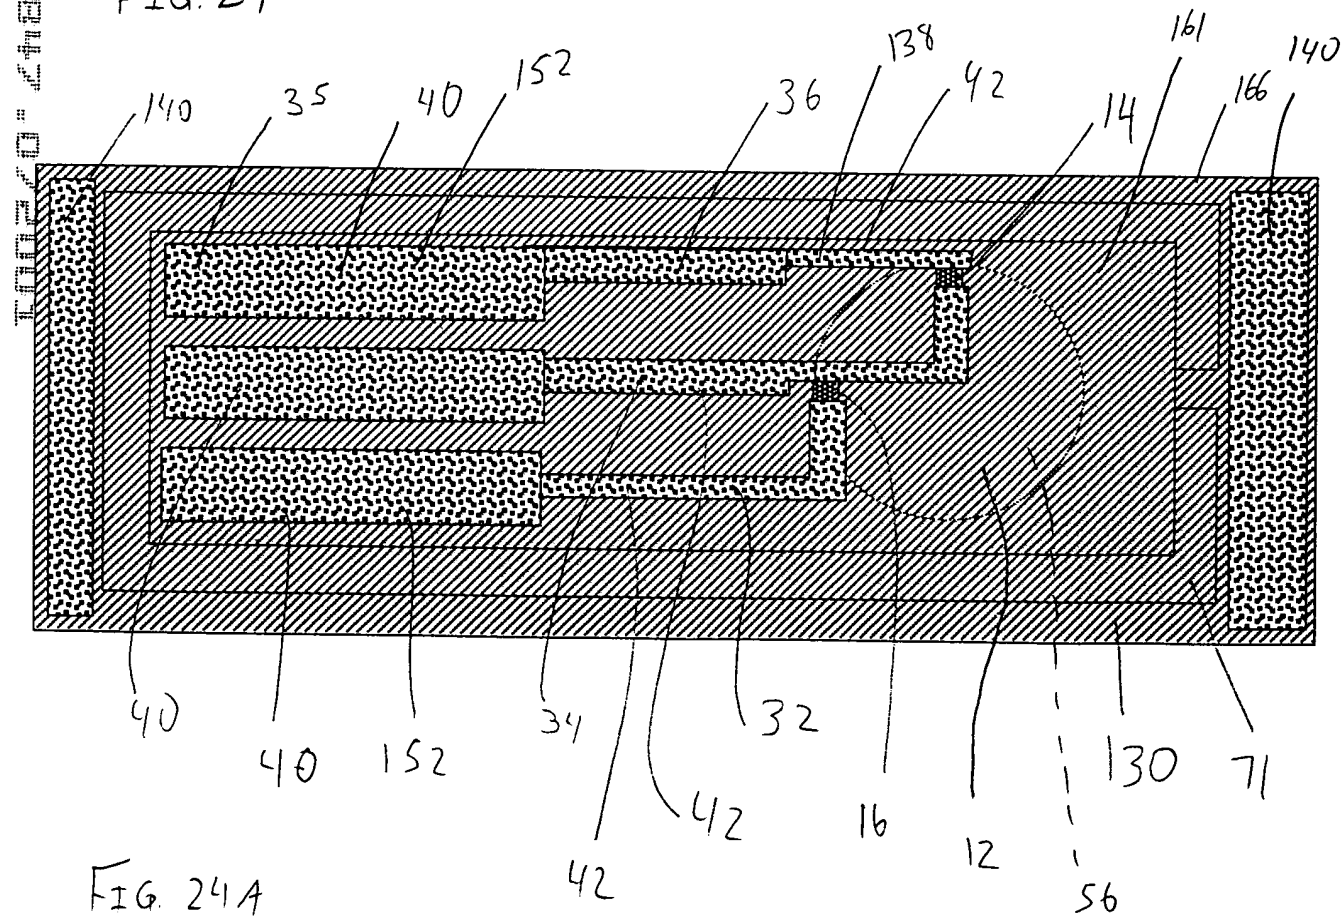


FIG. 24A





099009847-072001

